30W DALI DT6 Dimmable LED Driver (CC mode)

C€ RoHS F© ⊕ ⊕ ☆ 🖉 IP20

Important: Read All Instructions Prior to Installation





Features

DALI DT6 dimming.
Dimming range 0%-100%.
Output current level selectable from 250mA to 1000mA.
High power factor ≥ 95%.
Voltage accuracy be confind to±2.0%.
Current accuracy be confind to±5.0%.
Load regulation <2%
Extra-low voltage class 2 outputs,IP20 rated.
Short circuit& over-current &over-voltage protection.
Working temp -30~±50°C.

Parameters

Output	LED Channel	1 Channel		
	DC Voltage	8-55V,as per DIP selection		
	Current Max.	250-1000mA, as per DIP selection		
	Voltage Tolerance	±3%		
	Rated Power	30W max.		
Input	Voltage Range	100-277VAC		
	Frequency Range	50/60Hz		
	Power Factor	> 0.90 @ 230VAC		
	THD	\leqslant 12% (@ full load / 230VAC)		
	Efficiency	86% @ 230VAC full load		
	AC Current	0.17A @ 230VAC		
	Surge Current	COLD START Max. 35A @ 230VAC		
	Leakage Current	< 0.5mA/230VAC		
	Standby Power Consumption	< 0.5W		

Protection	Over Voltage	Lock mode, can be restored after fault removed and restart		
	Over Load	Restored after fault removed and restart		
	Short Circuit	Short circuit without damage, Hiccup mode, Auto-recovery		
Environment	Over temperature	Hiccup mode ,remove temperature can be self-recovery		
	Working Temp.	-30° C ~ + 50° C		
	Working Humidity	10% ~ 95% RH		
	Storage Temp. & Humidity	-40° C ~ + 80° C , 10% ~ 95% RH		
Safety & EMC	Max. Case Temp.	85° C (Ta="50° C ")		
	Safety Standards	UL 1310 ,CSA C22.2#223, EN 61347-1,EN 61347-2-13,EN 62493,AS/NZS 61347.1		
	Withstand Voltage	I/P-O/P: 3.75KVAC		
	Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC / 25° C /70%RH		
	EMC Emission	FCC Part 15 Subpart B,EN 55015:2013+A1,EN 61547:2009		
	EMC Immunity	EN IEC 61000-3-2:2019,EN 61000-3-3:2013		
	Cooling Method	Air Natural Cooling		
	Dimension	166*40*28mm (L*W*H)		
	Warranty	5 Years		
Dimming Control	Dimming Interface	DALI DT6 (DALI consumption<2mA) / Push		
	Dimming Range	0%-100%		
	Dimming Method	PWM		
	Dimming Curve	Linear/Logarithmic optional		

*All parameters are typical values tested at an ambient temperature of 25°C, unless otherwise specified.

Safety & Warnings

- DO NOT install with power applied to the device.
- DO NOT expose the device to moisture (except for waterproof power supplies)
- This driver should be installed by qualified and professional person.
- Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- Ensure that wiring is correct before testing in order to avoid light and power supply damage.
- If driver can not work normally, don't maintain privately.

Operation


>>DALI Address


1. DALI address for 1 channels output are assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

2.For specifications and wiring, please refer to the wiring diagram on the back. Please carefully check the wiring for correctness before applying power.

Wiring diagram

Product Dimension

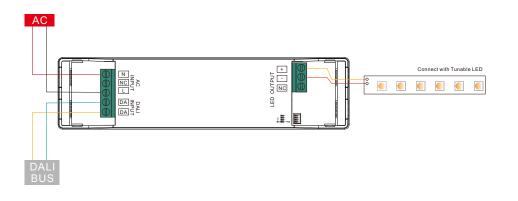

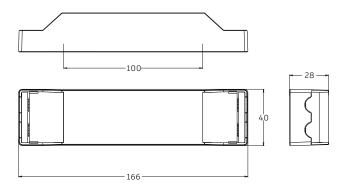

LED Current Selection

Voltage	Current	DIP	Voltage	Current	DIP
8-55V 8-55V 8-55V 8-55V 8-55V 8-55V 8-55V	250mA (300mA (350mA (400mA (450mA (8-55V 8-55V 8-55V 8-55V 8-55V 8-55V 8-55V 8-53V	650mA 700mA 750mA 800mA 850mA	1 2 3 4 $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$ $0 0 0$
8-55V 8-55V		$\mathbf{\tilde{O}} \bullet \bullet \mathbf{\tilde{O}}$	8-51V		$\bullet \bullet \bullet \bullet$